


Briley 3 Gun Comp Chokes

Briley 3 Gun Comp Chokes are designed to be timed with the ports open to the top of the barrel. The chokes are shipped with the compensators installed but left loose. To time the comps, install and fully tighten the choke into your barrel. Then remove the compensator, apply thread locker to the external threads at the muzzle end of the choke, and re-install the compensator until it lightly bottoms out on the threads. Then back the compensator off until it times with the ports open upwards. Each choke comes with its own compensator, and they will re-time whenever the choke is removed and re-installed to the barrel.

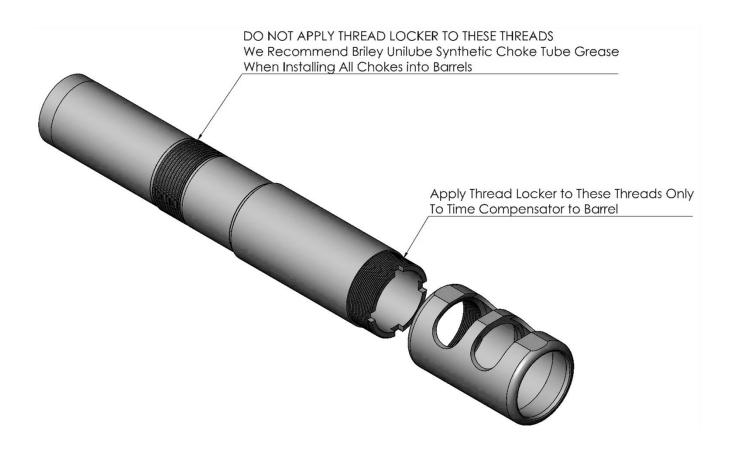

Note: We recommend using Loctite 271 High Strength or similar when timing the compensator. When the compensators are timed they will be specific to the barrel they were timed in. However, if you have multiple guns and might switch the chokes between them, Loctite 242 or similar can be used to allow for easier retiming of the compensator.